



Waxman Fibres Ltd  
Grove Mills  
Elland  
West Yorkshire  
HX5 9DZ  
England  
+44 (0) 1422 310600  
sales@waxmanfibres.co.uk  
www.waxmanfibres.co.uk



**Kanecaron PE**  
BEDDING

All information provided in this document, including technical statements, research results, analysis and recommendations, is given on the basis that no warranties or representations expressed or implied are given or made as to its accuracy. The information given in this document does not and will not form any part of a contract entered into by Waxman Fibres Ltd for the sale or supply of the products referred to in it. Waxman Fibres Ltd excludes all liability arising directly or indirectly out of any reliance upon the information given in this document.

The information supplied in this document is supplied as a guide only and is subject to change at any time without notice. The Purchaser must carry out its own research, experiments and tests to satisfy itself that the products referred to in this document are suitable for its purpose, and should not rely on any statements made in this document or made by any employee or representative of Waxman Fibres Ltd, concerning the use, handling, processing and properties of the said products.

This notice and any contract entered into with Waxman Fibres Ltd shall be construed in accordance with English Law and the Courts of England shall have exclusive jurisdiction in connection with any claim or dispute arising in relation thereto.

Kanecaron is produced by and is a trademark of Kaneka Corporation of Japan.

## The fibre to produce **inherently FR** bedding

A natural look and feel - **Kanecaron PE**  
BEDDING



## Basic Concept

With an intimate spun blend of 65% Cotton (or other cellulosic fibre) and 35% Kanecaron PE in both warp and weft, the resultant fabric produces an ideal inherently flame retardant bedding product.

This combination will help to achieve the following international FR bedding standards:

UK/EU: BS EN ISO 12952-2 and 12952-4

USA: Pending 16CFR1634  
(as evolved from California's TB604)

## What is Kanecaron PE?

Kanecaron PE is a very special modacrylic (modified acrylic) fibre that is inherently flame retardant. Kanecaron PE is our finest fibre at 1.7 d'tex and can thus be spun to finer counts for higher quality fabrics, particularly in applications such as bedding.



Features	Benefits
Inherently FR	Kanecaron PE is permanently and inherently FR. This is safer than chemical treatments and there is no loss of FR performance after repeated laundering, dry cleaning and spot cleaning
Fine decitex	Kanecaron PE is available in 1.7 d'tex, allowing the spinning of fine yarns for high quality bedding
Comfort	Cotton rich blends maintain the features of natural fabrics, with their comfort and handle
Natural look and feel	The look of cotton coupled with the natural lustre of Kanecaron PE combine perfectly
Blending fibre	Kanecaron PE is an ideal blending fibre with cotton and other cellulose. This results in the final fabric having the dual advantages of the inherent FR characteristics of Kanecaron PE, as well as the known qualities of cotton or cellulosic fibres
Standard dyeing	Kanecaron PE dyes in a similar manner to standard acrylic, thus allowing an unlimited choice of colours and shades

## How does it work?


Kanecaron PE has excellent charring characteristics as well as superior flame retardant properties (LOI 32). These, in an intimate blend with cotton or other cellulosic fibres, produce inherently FR bedding fabrics with the handle, comfort and advantages of cotton.

## The importance of charring

This is of critical importance in bedding fabrics, where the charred area (formed after burning) creates a barrier that prevents any substrate from igniting. The intimate blend of Cotton/Kanecaron PE is an ideal combination for preventing the continuation and spread of the flame, as well as maintaining the integrity of the fabric. Unlike FR polyester (which exhibits melting behaviour), the Cotton/Kanecaron PE fabric chars.

The fibre to produce

# inherently **FR** bedding

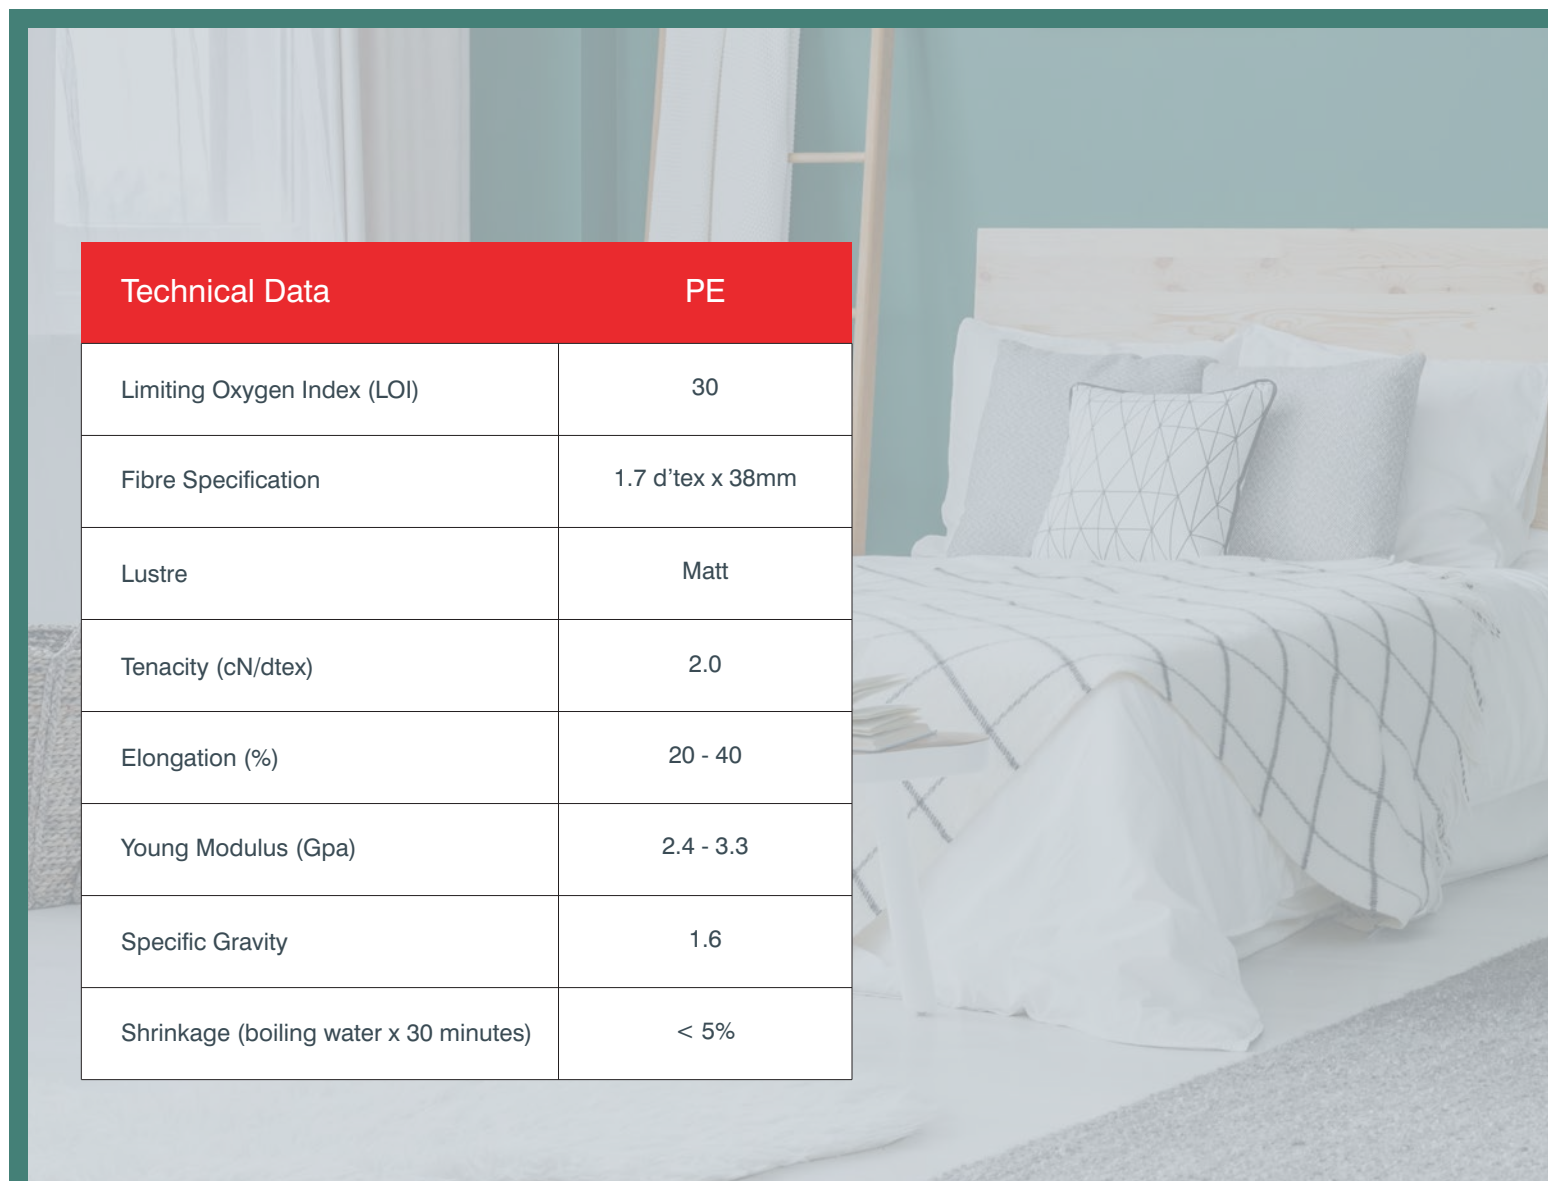

Technical Data	PE
Limiting Oxygen Index (LOI)	30
Fibre Specification	1.7 d'tex x 38mm
Lustre	Matt
Tenacity (cN/dtex)	2.0
Elongation (%)	20 - 40
Young Modulus (Gpa)	2.4 - 3.3
Specific Gravity	1.6
Shrinkage (boiling water x 30 minutes)	< 5%